


ROTATING PULVERIZERS

HRP SERIES

11 MODELS ROTATING PULVERIZERS FROM 1.120 UP TO 26.400 KGS
FOR CARRIERS FROM 9 ~ 250 TONS

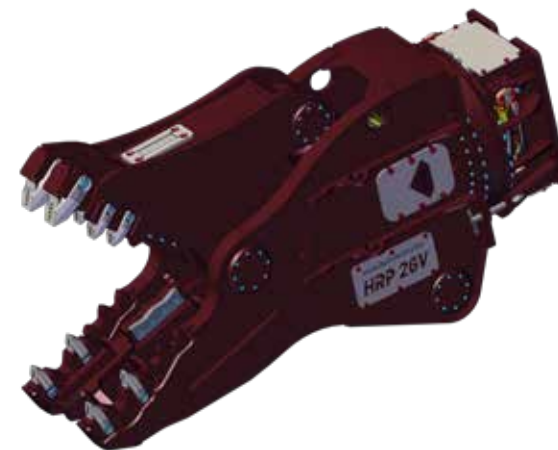

		HRP-12V	HRP-16V	HRP-20V	HRP-26V	HRP-32V	HRP-42V	HRP-62V	HRP-82V	HRP-120V	HRP-220V	HRP-280V
(1) Excavatorclass	T.	9 - 12	13 - 15	16 - 21	22 - 28	29 - 35	36 - 50	51 - 67	68 - 85	86 - 130	100 - 200	100 - 250
Weight	Kg.	1120	1430	2080	2630	3280	4060	5880	7860	12800	22900	26400
Jaw opening	mm.	655	705	745	870	915	980	1120	1320	1700	1900	2050
Cutter length	mm.	140	220	220	260	260	260	260	325	500	500	500
Workingpressure	Bar	380	380	380	380	380	380	380	380	380	380	380
Oilflow at open/close	L/min.	150 - 250	180 - 250	180 - 250	200 - 300	250 - 350	300 - 400	400 - 500	450 - 600	500 - 800	900 - 1200	900 - 1200
Workingpressure rotation	Bar	180	180	180	180	180	180	180	180	180	180	180
Oilflow rotation	L/min.	10	10	10	10	10	10	30	30	50	50	50
Open/close	Sec.	1.4 / 2.7	1.4 / 2.9	2.3 / 2.9	2.9 / 3.9	3.0 / 3.2	3.7 / 3.7	3.2 / 3.5	3.0 / 3.7	4.3 / 4.4	6.9 / 7.0	6.9 / 7.0

(1) Recommended excavator / attachment combination

Equipped with exchangeable teeth